


0.72W

55LM

170°

IP67

LifeSpan
50,000h

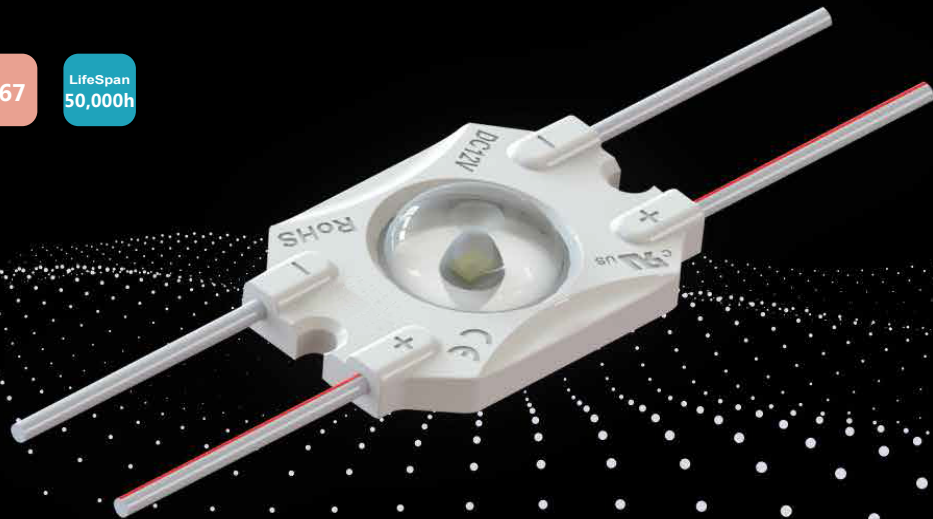

Features



- Sourced by high output SMD2835, good color conformity and no spot.
- 99.99% golden thread, pure copper bracket coated with silver.
- SDCM≤5 each BIN.
- Special lens design, 170°beaming angle with a even light.
- Overmoulded: anti-dusting, anti-moisture, waterproof, anti-shock.
- 50 pcs Max. in a series connection.
- CE, ROHS and UL certified.

Application



- Best for 4-10 cm depth single-sided light box at airports, metros, banks, buildings and shopping malls, etc.

Parameters




Items	Parameters
Part Number	2801203
CCT (K)	~7000K
Beaming Angle (°)	170
CRI (Ra)	≥75
Luminous Flux (lm)	55
Voltage (V)	DC12
Power (W)	0.72
Driving Method	Inner Constant Current
Dimension (mm)	37*25.5*7
Weight (g)	6.67
Working Tem. (°C)	-25 ~ +60
Storage Tem. (°C)	-25 ~ +70
Protection Grade	IP67


Dimension



Unit:mm

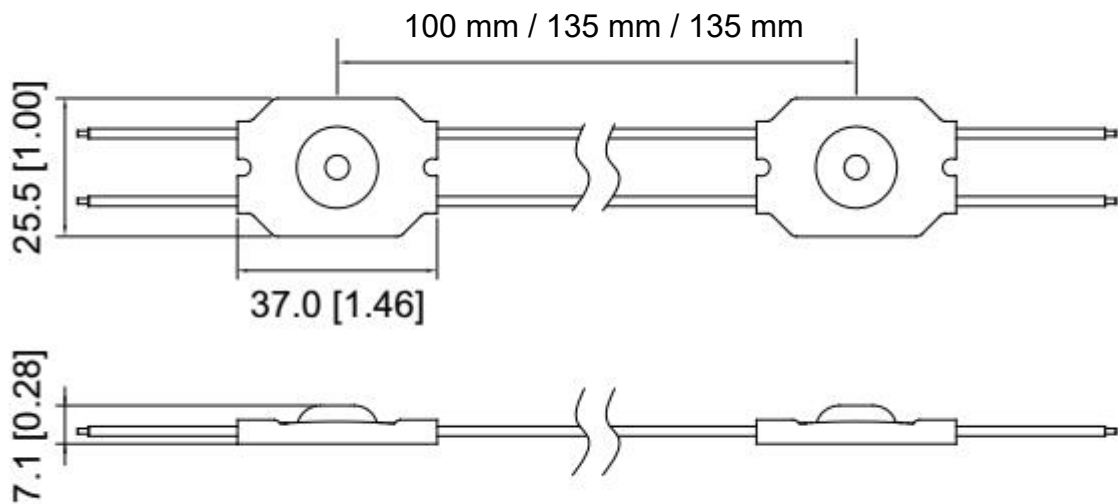

Beaming Angle >

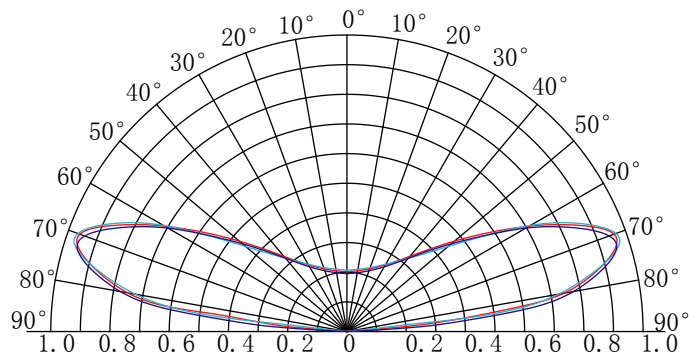


Reference Scheme >


Depth(mm)	Distance(mm)	Density(pcs/m ²)	Illumination(lux)
Dz=35	Dx=80 Dy=80	144	5400-5800
Dz=40	Dx=80 Dy=80	144	5200-5500
Dz=45	Dx=80 Dy=80	144	5000-5300
Dz=50	Dx=80 Dy=80	144	4800-5100
Dz=55	Dx=80 Dy=80	144	4600-4850

Remark:


- The transmittance of the advertising fabric was 32%.
- The above data is for reference only.

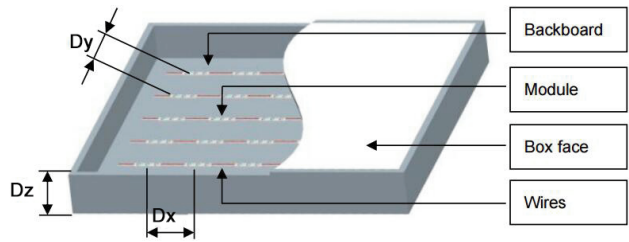


Wire Connection >

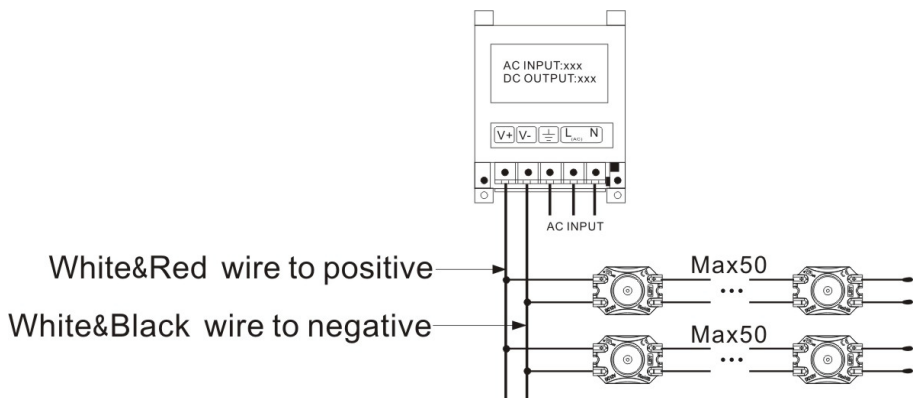


Packing



50 pcs per string



100 pcs in an antistatic bag

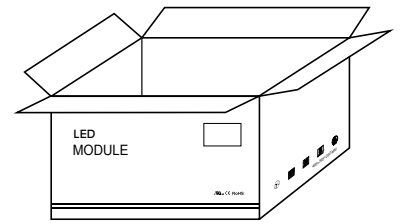

2000 pcs per carton

Packing Specification



- Antistatic bag adopted
- Packing information

Carton dimension(mm)	490*450*220
Bags per carton	20
Quantity per carton(pcs)	2000
Net Weight(kg)	13.33(1±10%)
Gross Weight(kg)	14.87(1±10%)

- Due to the packing manner difference, please subject to the original products in case of discrepancy found between the picture and actual product.

Warning



- Disassembling or modifying the product is forbidden.
- Installation with power on is forbidden.
- Any organic solvent chemical is forbidden.
- Acidic or alkaline adhesive is forbidden when install, neutral glass cement could be used for installation purpose, make it drying in open environment for four hours.
- Isolation and corrosion prevention on all wiring points and wire ends.
- Make sure the power wire is thick enough and ensure the voltage and connections are connected correctly before power on.
- This product should be used in a sign, do not expose it in opening site.
- Installation, maintaining should be done by professional staff.
- 50 pcs in a serial connection maximum.
- The power wire between power supply and module should be less than two meters to keep the same brightness on all parts.



- Warranty: 5 years.
- In order to ensure the safety, the broken wires need to be replaced by the manufacturer or the service agent, or by the staff with the similar qualification.
- The given data in the specification was based on the laboratory testing, there may be discrepancy found in the actual products.
- The given drawings in the specification are only for reference, there may be discrepancy found in the actual products.
- The products are subject to change without prior notification.

